




LUBRIFICATION - LUBRIFICAZIONE
SCHMIERUNG - LUBRICATION - SMØRING
SMEREN - KENES - MAZANI - VOITELU - SMERESANA
SMAROWANIE - СМАЗЫВАНИЕ
LUBRIFICAÇÃO - LUBRIFIERE



SAE 75W-90
API GL-5

Huile synthétique
Olio sintetico
Synthetisches Öl
Synthetic oil



SAE 80W-90
API GL-5

Huile minérale
Olio minerale
Mineralöl
Mineral oil

KF0001TL_16
10/2023







SELECT



SAE 80W-90
API GL-5




GMD33




1,30 L
(0.34 US gal)



0,20 L
(0.05 US gal)




GMD44




1,75 L
(0.46 US gal)

0,25 L
(0.06 US gal)

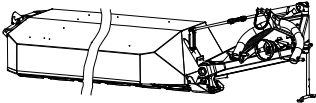


GMD55




2,00 L
(0.52 US gal)

0,25 L
(0.06 US gal)




GMD66

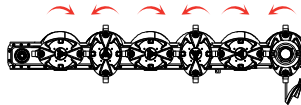


2,25 L
(0.59 US gal)

0,25 L
(0.06 US gal)



GMD77 HD

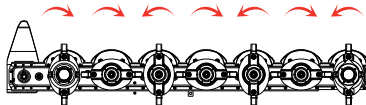


2,25 L
(0.59 US gal)

0,25 L
(0.06 US gal)



GMD16 - GMD20 GMD24 - GMD28




0,25 L
(0.07 US gal)


0,25 L
(0.07 US gal)

0,45 L
(0.12 US gal)


0,45 L
(0.12 US gal)




GMD16




1,40 L
(0.37 US gal)




GMD20

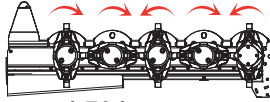


1,70 L
(0.45 US gal)




GMD24



2,00 L
(0.53 US gal)



GMD28



2,00 L
(0.53 US gal)




GMD100 - GMD100 GII



SAE 80W-90
API GL-5



GMD400 / GMD 400 HD




1,40 L
(0.36 US gal)



0,25 L
(0.06 US gal)



GMD500 / 500 S / 500 S HD




1,70 L
(0.44 US gal)

0,25 L
(0.06 US gal)



GMD600 / 600 GII / 600 GII HD




2,00 L
(0.52 US gal)

0,45 L
(0.11 US gal)



GMD700 / 700 GII / 700 GII HD




2,00 L
(0.52 US gal)

0,45 L
(0.11 US gal)



GMD800 GII / 800 GII HD





2,25 L
(0.59 US gal)

0,45 L
(0.11 US gal)


GMD240 - GMD280 GMD310 - GMD350



SAE 80W-90
API GL-5

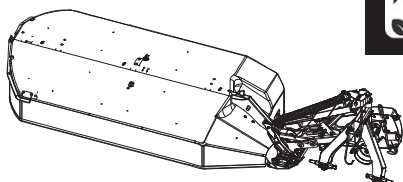


GMD240



2,00 L
(0.53 US gal)

0,50 L
(0.13 US gal)


GMD280



2,00 L
(0.53 US gal)

0,50 L
(0.13 US gal)


GMD310

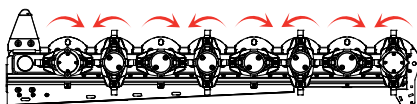

2,25 L
(0.59 US gal)

0,50 L
(0.13 US gal)


GMD350

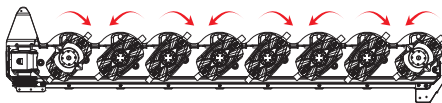

4,50 L
(1.18 US gal)



SAE 80W-90
API GL-5




0,50 L
(0.13 US gal)


FC883




SAE 80W-90
API GL-5



0,70 L x 2
(0.18 US gal)

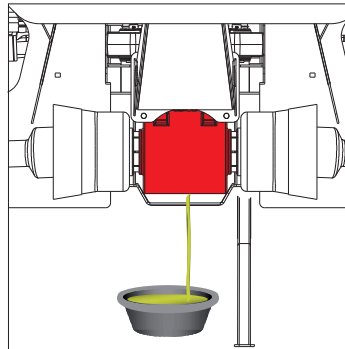


4,00 L
(1.05 US gal)

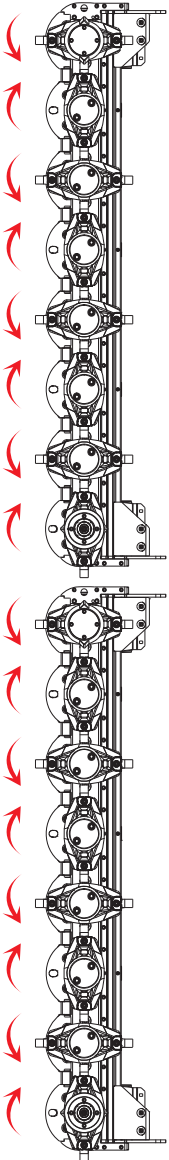


2,25 L x 2
(0.59 US gal)



GMD285 GMD315 - GMD355




 SAE 80W-90
API GL-5




FC813 - FC813 R




SAE 80W-90
API GL-5

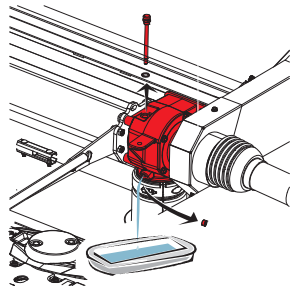

0,60 L x 2
(0.15 US gal)

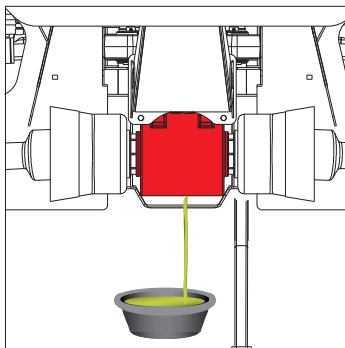

4,00 L
(1.05 US gal)

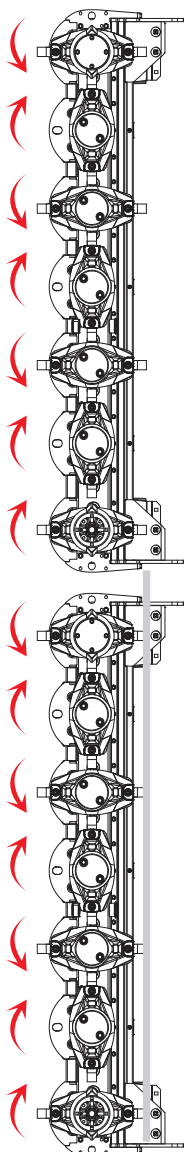

2,00 L x 2
(0.52 US gal)



GMD280 F - GMD310 F



 SAE 80W-90
API GL-5

A 0001 > A 1333:


 SAE 80W-90
API GL-5

A 1334 > :

 SAE 75W-90
API GL-5




540 /
1000min⁻¹



1000min⁻¹



GMD280 F




2,00 L
(0.52 US gal)

0,60 L
(0.15 US gal)

0,50 L
(0.13 US gal)

0,50 L
(0.13 US gal)

GMD310 F



2,25 L
(0.59 US gal)

0,60 L
(0.15 US gal)

0,50 L
(0.13 US gal)

0,50 L
(0.13 US gal)

FC280 F




SAE 80W-90
API GL-5



540 /
1000min⁻¹

1000min⁻¹




2,00 L
(0.52 US gal)

0,60 L
(0.15 US gal)


0,50 L
(0.13 US gal)



FC280 F



0,40 L
(0.11 US gal)



0,40 L
(0.11 US gal)



KF0001TL_16
10/2023

